INNOFLOW

SURGE PROTECTION DEVICE

GSP10-C40N

Series overview

Surge Protection Device for electrical distribution and control applications.

Select the exact rating, pole arrangement and operating configuration for the application.



Specification summary

Protection type	Type 2 AC surge protection
Uc options	275 / 320 / 385 V
Nominal discharge current	20 kA
Maximum discharge current	40 kA
Mounting	35 mm DIN rail; IP20


Technical information

Selected dimension and connection drawings follow. Match each drawing to its stated frame and pole configuration.


GSP10-C40N

DIMENSIONS & TECHNICAL REFERENCE


Dimensional drawing

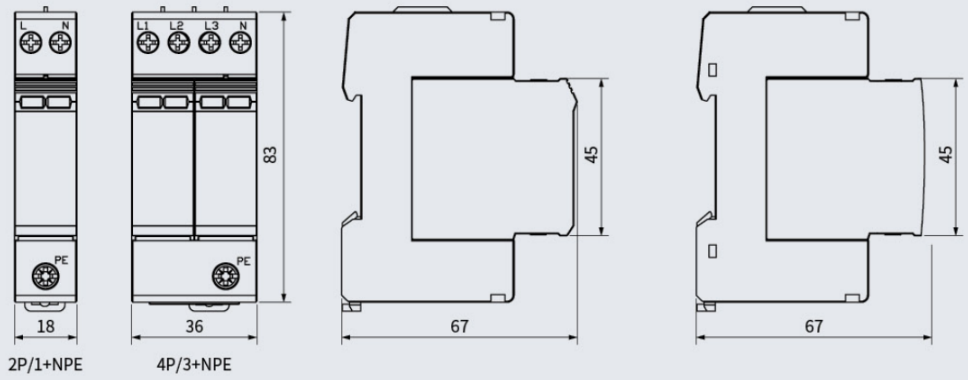

Schematic diagram

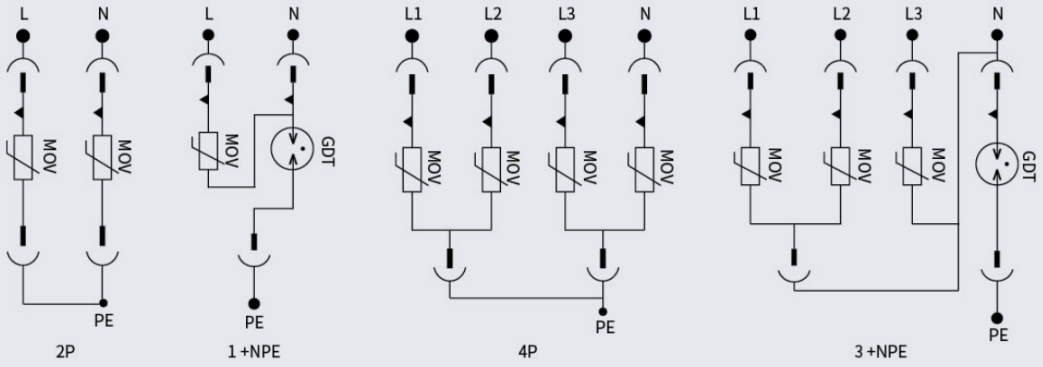

Wiring diagram

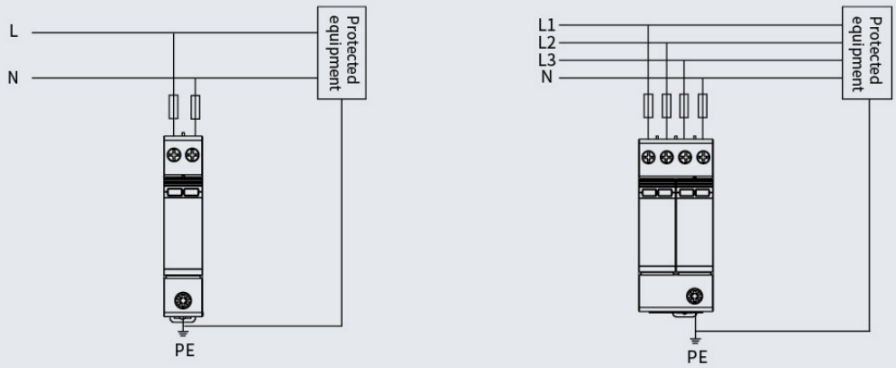

Use the stated units and configuration. Drawings are reproduced from the authorized technical source.