INNOFLOW

SURGE PROTECTION DEVICE

NU6-I+II

Series overview

Surge Protection Device for electrical distribution and control applications.

Select the exact rating, pole arrangement and operating configuration for the application.



Specification summary

Protection type	Type I + II
System voltage	230 / 400 V
Uc options	255 / 275 / 385 V
L-PE impulse current	Iimp 12.5 kA
L-PE maximum current	Imax 50 kA


Technical information

Selected dimension and connection drawings follow. Match each drawing to its stated frame and pole configuration.

NU6-I+II

DIMENSIONS & TECHNICAL REFERENCE

NU6-I+II/F 12.5kA

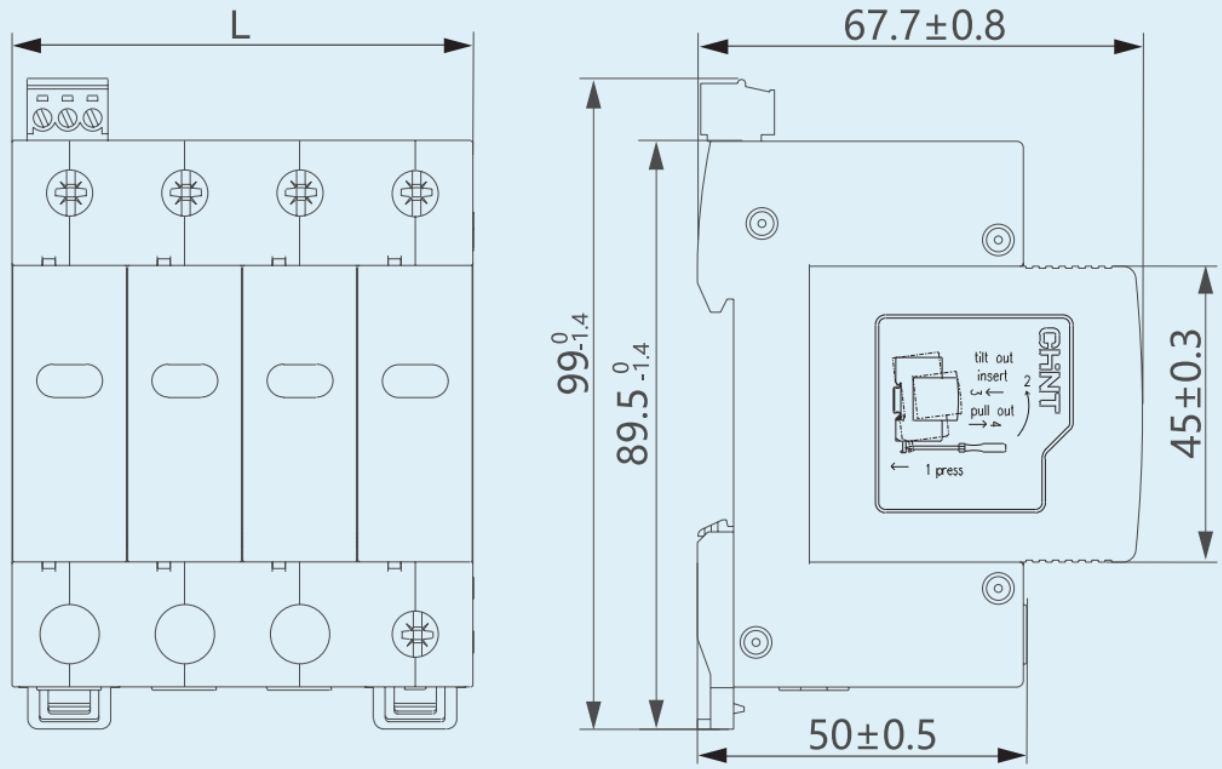

Poles	1P	1P+N, 2P	3P	3P+N, 4P
L(mm)	18 0 -0.6	36 0 -1.2	54 0 -1.8	72 0 -2.4

Use the stated units and configuration. Drawings are reproduced from the authorized technical source.