INNOFLOW

SURGE PROTECTION DEVICE

TGU3

Series overview

Surge Protection Device for electrical distribution and control applications.

Select the exact rating, pole arrangement and operating configuration for the application.



Specification summary

Frequency	AC 50 / 60 Hz
System voltage	380 V and below
Earthing systems	TT / IT / TN-S / TN-C-S
Selection	Protection mode, Imax and Uc vary by model.


Technical information

Selected dimension and connection drawings follow. Match each drawing to its stated frame and pole configuration.


INNOFLOW

TGU3

DIMENSIONS & TECHNICAL REFERENCE

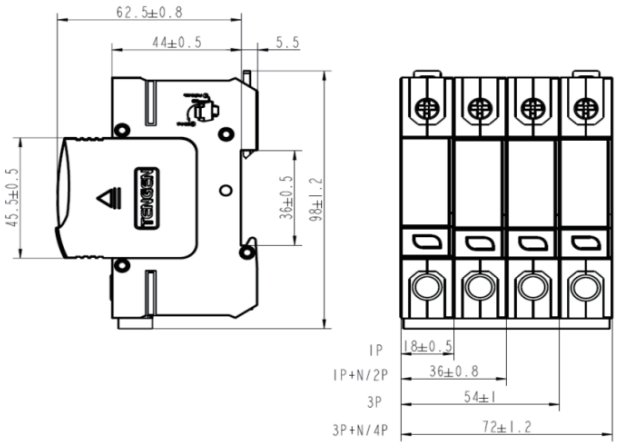

4.2 Outline and installation dimension drawings of TGU3-C (80-160) and TGU3-B (15-25) are shown in Fig. 2

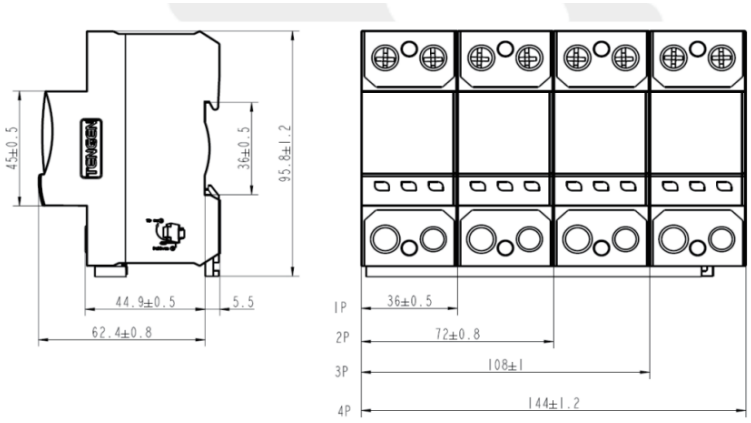

Use the stated units and configuration. Drawings are reproduced from the authorized technical source.